
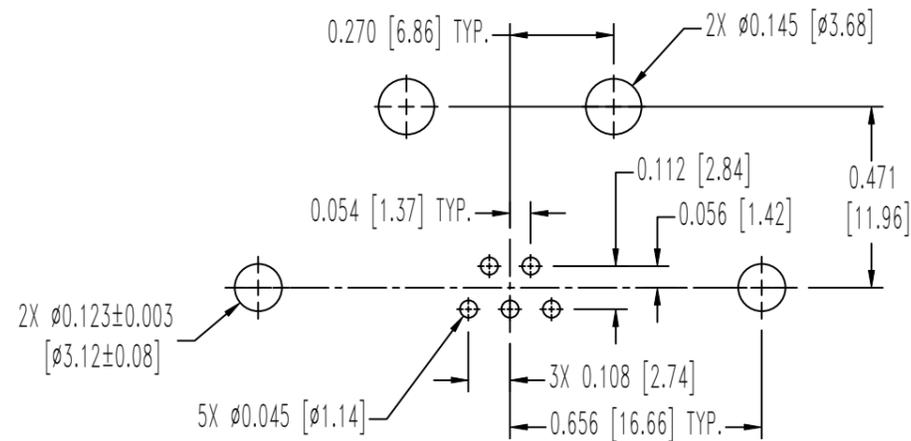
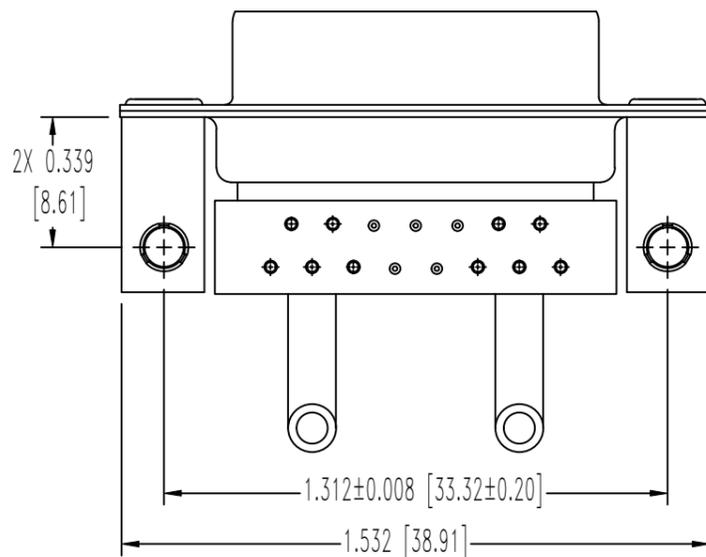
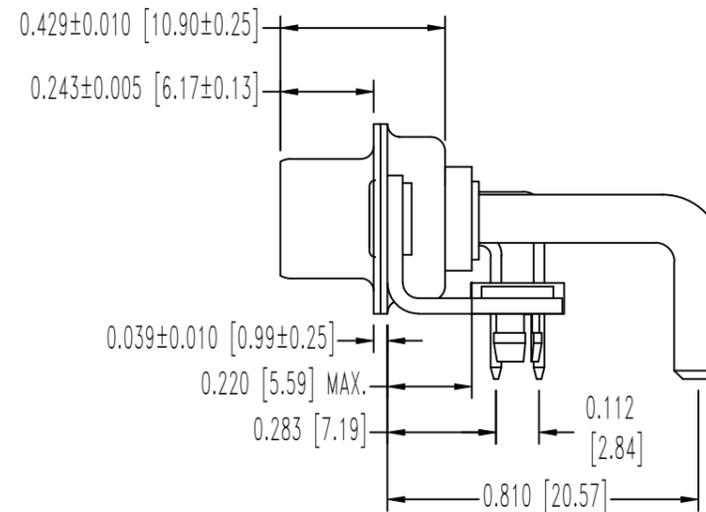


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
11-7-11	NC	ECO 34703	COLE	TL	COLE
8-15-13	A	ECO 40482	COLE	BE	COLE
4-19-16	B	ECO 50484	COLE	BE	COLE

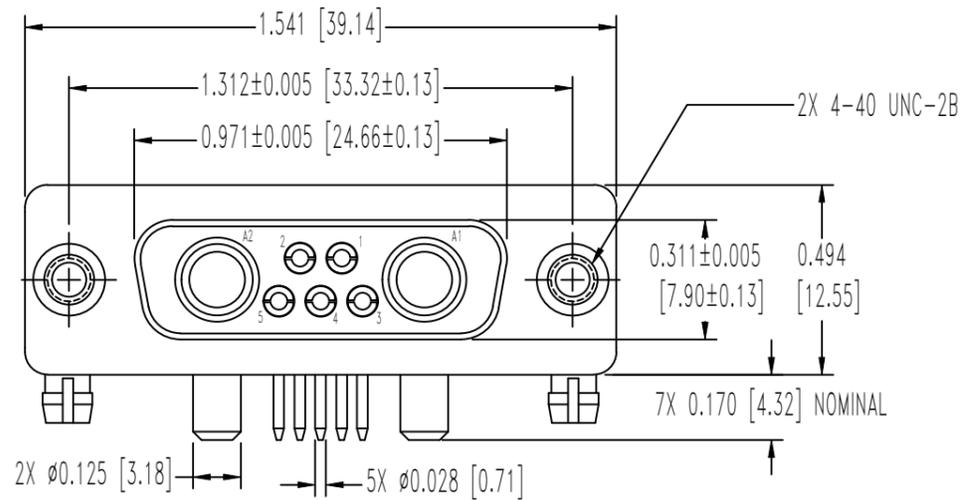

CONTACT HOLE PATTERN

NOTES:

- MATERIALS AND FINISHES:  
 INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLUE COLOR.  
 CONTACTS: SIGNAL CONTACTS-PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.  
 POWER CONTACTS-PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.  
 SHELLS: STEEL, TIN PLATED.  
 BRACKETS: BRASS, TIN PLATE.  
 ALIGNMENT BAR: POLYESTER, COLOR: BLACK  
 PUSH-ON FASTENERS: BERYLLIUM COPPER, TIN PLATE.  
 RIVETS: STEEL, TIN PLATE.
- DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION AT CONNECTPOSITRONIC.COM.
- CONNECTORS ARE COMPLIANT TO THE CURRENT RoHS DIRECTIVE.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

	<b>POSITRONIC INDUSTRIES INC.</b> www.connectpositronic.com		FSCM 28198
	SCALE N.T.S.	DRAWN BY T. LANNING	APPROVED BY COLE
DECIMAL TOL. ± 0.015 [0.38]	TITLE CBD SERIES		
CBD7W2F57R7NOX/AA			
ANGULAR TOL. ± 5°	DATE 11-7-11	DRAWING NUMBER SK12993	REV. B