

Intermediate coupler; 5-pole/3-pole; Cod. A; L1 - L; black

www.wago.com/770-901



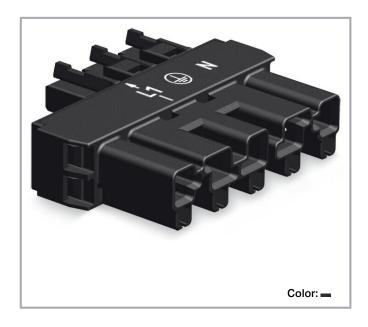

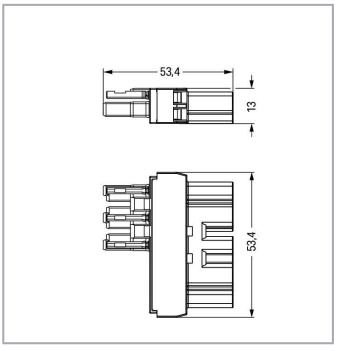

Item description

Distribution connector WINSTA® MIDI 5-pole

For signal and power transmission: The *WINSTA*® MIDI distribution connector A coding. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to establish connections according to many different requirements in next to no time. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector offers protection against contact with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). General mains applications for almost any domain of use can be realised with *WINSTA*® MIDI pluggable installation connectors with A coding. Important parameters in the selection of a pluggable installation connector are the rated current and voltage: They tell us about the product's domains of use. This product has a current rating of 25 A – as a result it is suitable for robust loads. Our *WINSTA*® MIDI product line allows total flexibility for the electrical installation. With its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees time-saving, error-free installation and offers customization for meeting all installation requirements.

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222. www.wago.com/770-901



WINSTA® MIDI solutions for your electrical installation – protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also reduce installation costs without compromising safety and quality: The WINSTA® MIDI pluggable installation connector with protection against mismating reduces the need for servicing and prevents unnecessary downtime.

- effective protection against mismating
- pre-assembled versions
- with A coding for a great number of applications
- ready to install and use immediately
- quick replacement of defective units during ongoing operation

Data

Electrical data

Ratings per IEC/EN

Ratings per	IEC/EN 60664-1
Nominal voltage (III/3)	400 V
Rated impulse voltage (III/3)	6 kV
Rated current	25 A
Legend (ratings)	(III / 3)

Ratings per IEC/EN 2

Rated voltage (III/3) 2	250 V
Rated surge voltage (III/3) 2	4 kV

Ratings per UL 1977

Note for the US market	Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office.
Rated voltage (UL 1977)	600 V
Rated current UL 1977	23 A

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-901



General

Note on contact resistance	approx. 1 m Ω of contact resistance approx. 0.25 m Ω contact transition plug/socket	
Connection data		
Total number of potentials	5	
Connection 1		
Pole number	5	
Physical data		
Pin spacing	10 mm / 0.394 inches	
Width	53.4 mm / 2.102 inches	
Height	13 mm / 0.512 inches	
Depth	53.4 mm / 2.102 inches	

Mechanical Data

Application	General mains applications	
Coding	A	
Variable coding	Yes	
Marking	L1 - L	
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)	
Retention force of a plug-in connection	When locked: > 80 N	
Unmating force of a plug-in connection	Unlocked: approx. 20 70 N (depending on pole number)	
Number of mating cycles	200, without resistive load	
Type of distribution box	Intermediate coupler	
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)	
Suitable	5- to 3-pole; L1 - L	

Plug-in connection

Contact type (pluggable connector)	Socket/plug
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when:

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-901



	a.) plugging different numbers of polesb.) plugging while rotated 180c.) plugging while laterally staggeredd.) plugging one pole
Locking lever	yes
Locking of plug-in connection	locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material Data

Note (material data)

Information on material specifications can be found here

Color	black
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.411 MJ
Weight	15.3 g

Environmental requirements

Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-03
eCl@ss 9.0	27-44-06-03
ETIM 8.0	EC002567
ETIM 7.0	EC002567
PU (SPU)	50 pcs
Packaging type	box
Country of origin	DE
GTIN	4045454424626

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?

www.wago.com/770-901



Customs tariff number 85366990990

Environmental Product Compliance

RoHS Compliance Status Compliant, No Exemption

Optional accessories

\sim	_	٠,	_	
·	u	v	е	

Cover

A STATE

Item no.: 770-360

Lockout cap; for plugs; 5-pole; separable; yellow

www.wago.com/770-360

1

Item no.: 770-201

Lockout cap; 12-pole, separable; for sockets; Plastic; black

www.wago.com/770-201

A Black Parket State Sta

Item no.: 770-221

Lockout cap; 12-pole, separable; for sockets; Plastic; white

www.wago.com/770-221

Downloads Documentation

Bid Text

770-901 X81 - Datei	2019 Feb 19	xml 2.7 kB	Download
770-901 doc - Datei	2014 Dec 10	doc 23.6 kB	Download

CAD/CAE-Data

CAE data

EPLAN Data Portal 770-901	URL	Download
WSCAD Universe 770-901	URL	Download
ZUKEN Portal 770-901	URL	Download

CAD data

2D/3D Models 770-901 URL Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products?



Environmental Product Compliance


Compliance Search

Environmental Product Compliance 770-901 Intermediate coupler; 5-pole/3-pole; Cod. A; L1 - L; black URL

Download

Installation Notes

Installation



Mounting plates can be secured using commercially available screws or nail-drive anchors.



The distribution connectors snap together when attached to the mounting plate.



To release the distribution connector, unlock the latch using a screwdriver.



All distribution connector connections are locked and protected against accidental disconnection directly after mating. Locking of any connection is released using a screwdriver, even if all connections are used.

Product family

 $\label{thm:continuity} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.

www.wago.com/770-901



WINSTA® MIDI

Show all products from the family

 $\label{thm:condition} \textbf{Subject to changes. Please also observe the further product documentation!}$

WAGO GmbH & Co. KG Hansastr. 27 32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169 Email: info.de@wago.com | Web: www.wago.com Do you have any questions about our products? We are always happy to take your call at +49 (571) 887-44222.